



# Cseries

CARTRIDGE FILTERS




- ✓ 40mm Suction and Outlet
- ✓ Configurable Ports for Installation
- ✓ Filter between 15-10 Microns



### Features

- ✓ Robust lock-ring mechanism
- ✓ Fast easy access to the element for maintenance, and a safe reliable method of sealing the lid
- ✓ Automatic air bleeding eliminates the need for continual manual bleeding
- ✓ Internal automatic pressure release prevents damage to pump & filter in the event of a blockage
- ✓ Offering four different models over three different sizes, ensuring you get the right size for your application

### Dimensions

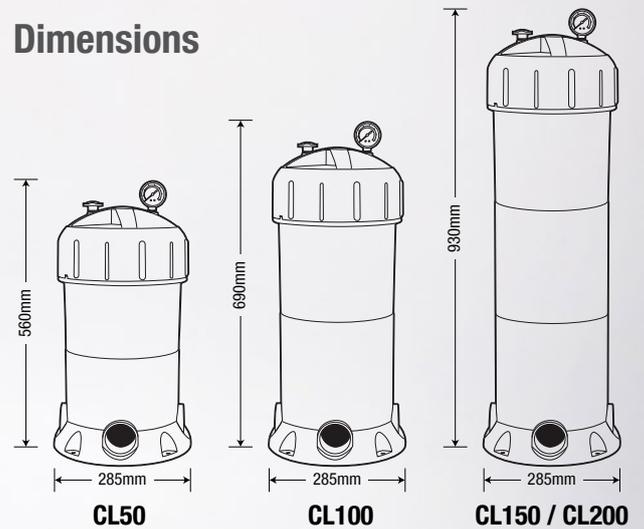

### Warranty

✓ 5 years warranty (excluding cartridge)



### Specifications

MODEL	CL50	CL100	CL150	CL200
Max Flow Rate (L/min)	325	370	470	470
Minimum Element Removal Height	870mm	1075mm	1564mm	1564mm
Recommended Pump Model	EP-550 0.75 hp	SQI-400 / EP-750 / SQ Gemini 1.0 hp	SQI-500 / EP-930 1.25 hp	SQI-600 / SQI-700 / EP-1100 1.5-2.0 hp
Maximum Working Pressure	280 kPa	280 kPa	280 kPa	280 kPa



Poolrite is an Australian made and owned product of the Evolve Group of companies



See the full range of products at

[poolrite.com](http://poolrite.com)

